AC 56

Scotsman[®]

Self Contained Ice Machine up to 35 kg

ltem #:	
Project:	
Quantity:	



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.



AC L 56 Large Gourmet 39 g Ø 38 x H 41 mm



AC M 56 Medium Gourmet 20 g Ø 30 x H 34 mm



AC S 56 Small Gourmet 8 g Ø 21 x H 25 mm

CONDENSING SYSTEM	INTERNAL BIN CAPACITY					
Air cooled Water cooled		12 kg				
REFRIGERANT GAS		ERATING JIREMENTS				
R134a		Minimum	Maximum			
	0	10°C	43°C			
VOLTAGE V/Hz/ph	Water temperature	5°C	38°C			
230/50/1	Water pressure	1 bar (14 psi)	5 bar (70 psi)			
230/60/1	Electrical voltage	-10%	+10%			

Certifications:


















AC 56

Scotsman° Ice Systems

Self Contained Ice Machine up to 35 kg

Item #:
Project:
Quantity:

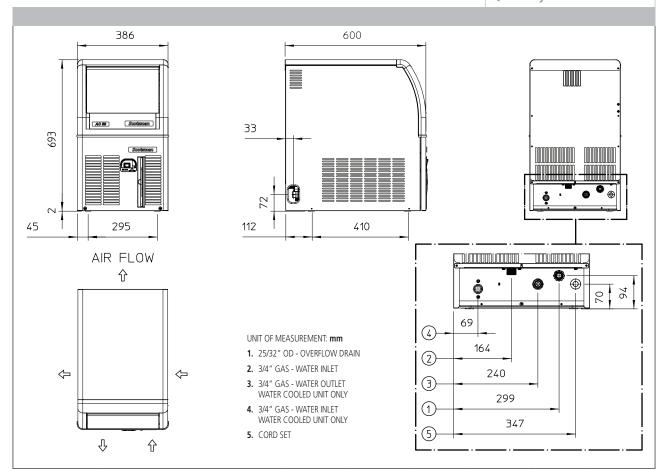

		Version	voitage	Dit
UNIT DATA		AC L 56 AS	230/50/1	27
Size (W x D x H)	386 x 600 x 695 mm	AC L 56 WS	230/50/1	27
Net weight	36 kg	AC M 56 AS	230/50/1	27
		AC M 56 AS	230/60/1	30
		AC M 56 WS	230/50/1	27
SHIPPING DATA		AC M EG MC	220/60/1	20

460 x 670 x 810 mm

43 kg

Version	Voltage	Btu/h	W	No.	Ømm²	Α
AC L 56 AS	230/50/1	2730	800	3	1.5	10
AC L 56 WS	230/50/1	2730	800	3	1.5	10
AC M 56 AS	230/50/1	2730	800	3	1.5	10
AC M 56 AS	230/60/1	3071	900	3	1.5	10
AC M 56 WS	230/50/1	2730	800	3	1.5	10
AC M 56 WS	230/60/1	3071	900	3	1.5	10
AC S 56 AS	230/50/1	2730	800	3	1.5	10
AC S 56 WS	230/50/1	2730	800	3	1.5	10

Circuit wires

Max. fuse size

Compressor

			24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC L 56 AS	Air	230/50/1	31	30	23	33.1	7.6	4.2	400
AC L 56 WS	Water	230/50/1	31	30	23	33.1	7.6		400
AC M 56 AS	Air	230/50/1	32	31	24	33.0	7.9	3.8	400
AC M 56 AS	Air	230/60/1	35	34	27	32.3	8.6	4.4	470
AC M 56 WS	Water	230/50/1	33	31	27	26.0	7.0	20.2	400
AC M 56 WS	Water	230/60/1	35	34	27	32.3	8.6		470
AC S 56 AS	Air	230/50/1	25	24	19	38.6	7.1	3.1	400
AC S 56 WS	Water	230/50/1	25	24	19	38.6	7.1		400

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Carton (W x D x H)

Weight