

Self Contained Ice Machine up to 120 Kg



Routine Maintenance Alarm



Front ON-OFF Switch




Proximity condenser air filter



Electronic



Recessed Connections Panel



Water outlet (Progressive Water Discharge)

Water Discharge up to 15 mt away and 1.7 mt high with PWD



Features

- Produces granular shape ice flakes, 80% hardness
- Up to 120 kg (264,5 lbs) daily production
- Up to 40 kg (88 lbs) ice storage capacity
- Ice scoop holder safely positioned in ice-storage bin
- Resistant stainless steel exterior
- Advanced diagnostics computerized control
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible, front panel mount, ON-OFF Switch
- Easy, front panel access to technical / service area of the machine
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice storage access, with disappearing door
- Door-closing movement dampening system
- AgION antimicrobial agent embedded in molded plastics parts
- CFC-free R-404A Refrigerant
- Vapor-based microbial control system pouch in ice storage area
- PWD System for remote water drain (Easy-fit installation)

EF 124 Technologies



		10°: 10°C		21°: 15°C				
		[kg]	[lbs]	[kg]	[lbs]			[kg]
EF 124 AS		120	264,5	108	238	40	88	
EF 124 WS		120	264,5	108	238	40	88	
							[WxDxH mm]	950x605x789/872
							[WxDxH inches]	37 3/8"x23 13/16"x31 1/34"
							 [v/Hz/ph]	230/50/1
							 R404A	

Flake Ice

Residual water content 20%



Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 20% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 120 Kg

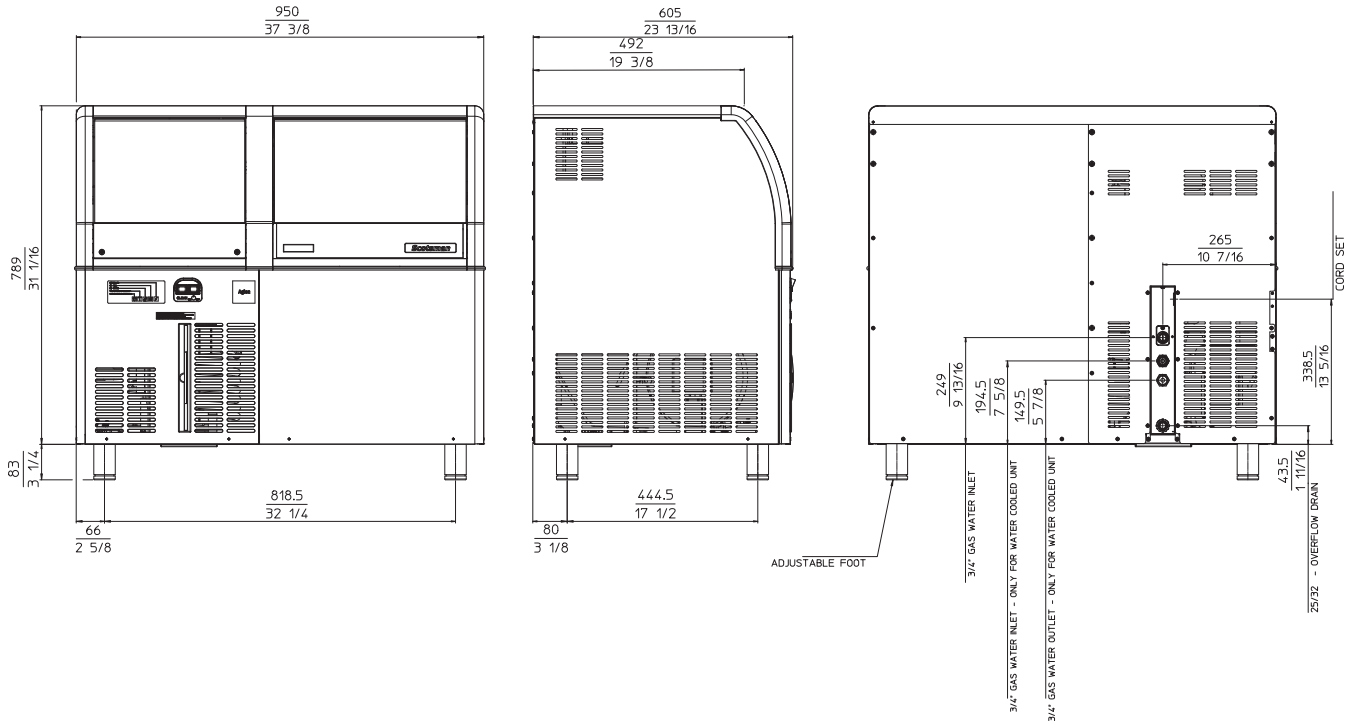

EF 124 AIR COOLED

°C \ °F	°C / °F				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264,5	255,5	247	229	lbs
21°	112	108	104	96	kg
70°	247	238	229	211,5	lbs
32°	100	96	92	84	kg
90°	220,5	211,5	203	185	lbs
38°	90	86	82	74	kg
100	198,5	189,5	180,5	163	lbs



EF 124 WATER COOLED

°C \ °F	°C / °F				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	114	108	96	kg
50°	264,5	251,5	238	211,5	lbs
21°	114	108	102	90	kg
70°	251,5	238	225	198,5	lbs
32°	104	99	94	84	kg
90°	229	218	207	185	lbs
38°	104	99	94	84	kg
100	229	218	207	185	lbs



Minimum

10°C (50°F)



Maximum

43°C (109°F)

5°C (41°F)

35°C (95°F)

-10%

+10%

1 BAR
14 psi

5 BAR
70 psi

Model	Cooling Type	Capacity [Btu/h] [W]	Ice Size [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water Inlet [l/h]	Water Inlet [gal/h]	Weight [kg] [lbs]	Dimensions [kg] [lbs]
EF 124 AS	Air Cooled	4436 1330	1,5	560	10	13,7	3,8	1	66 145	77 169
EF 124 WS	Water Cooled	4436 1330	1,5	470	10	12,7	37,3	9,8	66 145	77 169

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com