



Modular Flake-Ice Machine up to 200 Kg

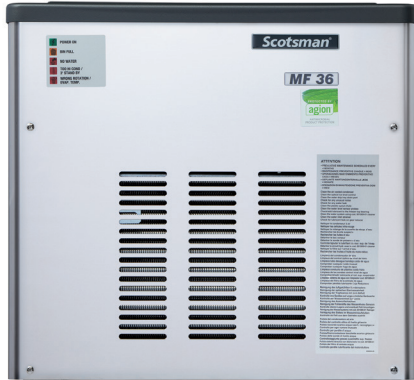

PS plastic top cover



Electronic Controls




Stainless Steel



MF 36+SB193 (sold separately)


MF 36+SB322 (sold separately)

MF 36+SB393+Top (sold separately)

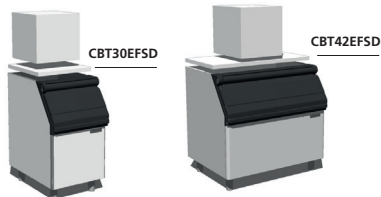

MF 36+SB530+Top (sold separately)

MF 36+SB550+Top (sold separately)

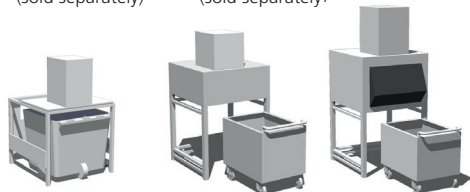

MF 36+RBC Stand (sold separately)

MF 36+SIS300 (sold separately)

MF 36+SIS700 (sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions



Features

- Modular Flake-ice machine, production up to 200 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in PS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, with 25% residual water content, hence very rich in moisture.
- CFC free R-404A Refrigerant

MF 36 Technologies



	+C° -C°	24h 10°: 10°C [kg] [lbs]		21°: 15°C [kg] [lbs]		W D H [WxDxH mm] 564x536x531
		10°: 10°C [kg] [lbs]		21°: 15°C [kg] [lbs]		
MF 36 AS		200	441	185	408	[WxDxH inches] 223/16" x 211/8" x 207/8"
MF 36 WS		200	441	190	418	
						[v/Hz/ph] 230/50/1
						R 404 A



Residual water contents 25%


Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 200 Kg

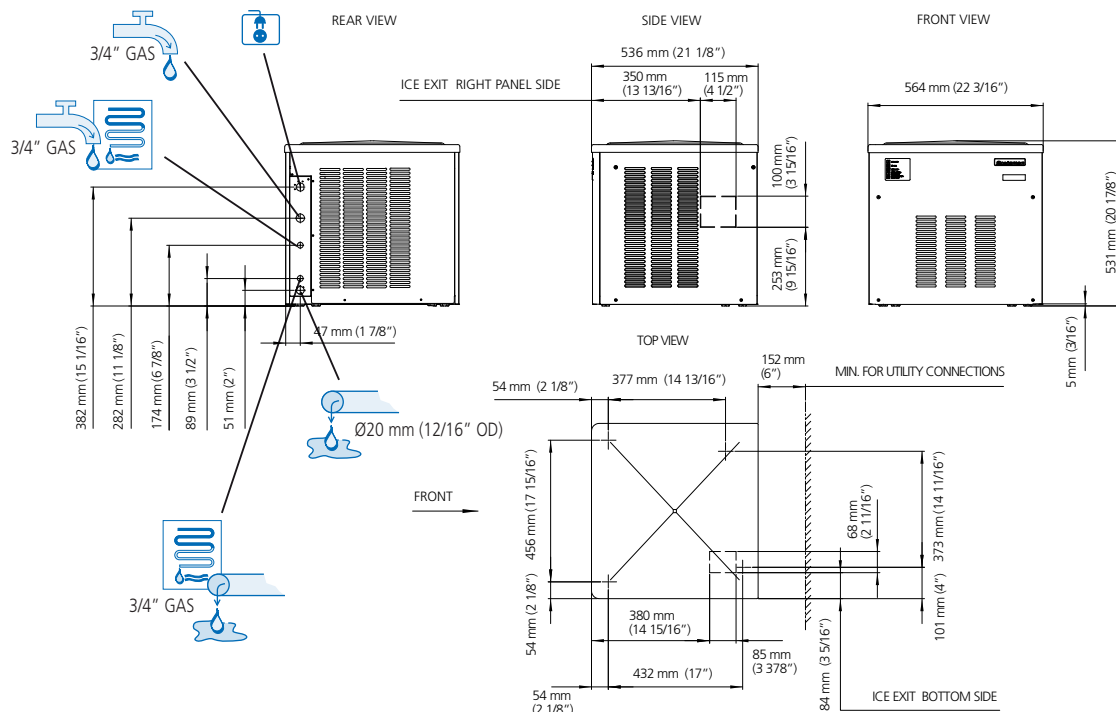

MF 36 AIR COOLED

°C / °F	50° / 10°		60° / 15°		70° / 21°		90° / 32°	
	10°	200	193	186	172	kg		
50°	441	425,5	410	379	lbs			
21°	192	185	178	164	kg			
70°	423	408	392	362	lbs			
32°	169	162	155	141	kg			
90°	372,5	357	342	311	lbs			
38°	153	146	139	125	kg			
100	337	322	306	275,5	lbs			



MF 36 WATER COOLED

°C / °F	50° / 10°		60° / 15°		70° / 21°		90° / 32°	
	10°	200	193	186	172	kg		
50°	441	425,5	410	379	lbs			
21°	197	190	183	169	kg			
70°	434	419	403	372,5	lbs			
32°	189	182	175	161	kg			
90°	417	401	386	355	lbs			
38°	183	176	169	155	kg			
100	403	388	372,5	342	lbs			



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Icon	Unit	Unit	Unit	Unit	Unit	Unit	Unit	Unit	Unit	Unit		
MF 36 AS	32°C / 90°F	6400	1875	3 x 1,5	760	10 A	11	6.5	1.7	49	108	56	123
MF 36 WS	21°C / 70°F	6400	1875	3 x 1,5	760	10 A	9.7	102	27	49	108	56	123

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com