










It allows the regulation of the water temperature



SANREMO

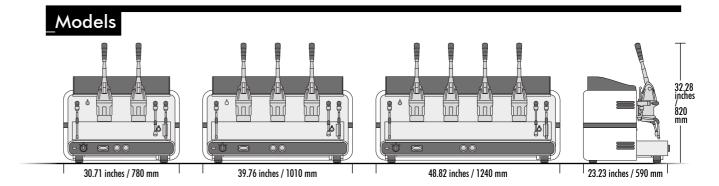

4 group

2 steam taps

1 water tap

1 one-cup portafilters

4 two-cup portafilters



2 group

2 steam taps

1 water tap

1 one-cup portafilters

2 two-cup portafilters

 ϵ

_Technical data		2 group	3 group	4 group
voltage	٧	220-240 1N / 280-415 3N		
power imput	kW	3.85	5.9	7.15
steam boiler capacity	US gal / It	3.17 / 12	5.02 / 19	6.87 / 26
steam boiler power	kW	3.5	5.5	7
pump power	kW	0.13	0.13	0.13
net weight	lb / kg	172 / 78	240 / 109	291 / 132

3 group

2 steam taps

l water tap

1 one-cup portafilters

3 two-cup portafilters



Black RAL 9005 RAL 9003 White White | Matte black RAL 9003 | 9005 White | Red RAL 9003 | 3002

Colors





Characteristics



GLASS LEVEL It allows to monitor the water level in the boiler.



TEMPERATURE SETTING DISPLAY It allows to regulate with precision the water temperature in the boiler for the production of coffee.



ELECTRONIC AUTO-LEVEL
Through a electronic level probe the boiler is automatically filled and maintained to the right filling level.

STATIC RELAY BOILER TEMPERATURE It allows to regulate with the




BOILER PRESSURE GAUGE It allows to control the boiler pressure.



PUMP PRESSURE GAUGE



It allows to control the distribution pressure.





EASY SERVICE
Easy access to the internal parts for a quick and easy technical assistance.



Optional

HEATER Dedicated resistor to keep all the cups at the optimal temperature.

For more information about our coffee machines please contact us at export@sanremomachines.com













SANREMO coffee machines s.r.l. Via Giacomo Bortolan 52 31050 Vascon di Carbonera [TV] — ITALY T +39 0422 448900 F + 39 0422 448935 www.sanremomachines.com