

RANCILIO Classe 5 S 1 Group

Entry-level to Mid range Traditional Espresso Machine

ESPRESSO MACHINE SPECIFICATIONS:

The Classe 5 exemplifies functional minimalism combined with contemporary aesthetics. It features modern side panels, curved group covers and an ergonomic work area for comfort and convenience.

The Classe 5 is the combination of modern style and contemporary art in an espresso machine. Made from brushed stainless steel, ABS and nylon panels, the Classe 5 S has a sleek button for manual dosing control. The Classe 5 comes in Standard or Tank version in Anthracite Black and Ice White.

Discover functional minimalism with the Classe 5.



STANDARD FEATURES:

- Made from brushed stainless steel, ABS and nylon panels
- Semi-automatic brewing buttons - barista chooses when shot starts and stops
- Independent heat exchangers
- Electrical heating
- Built-in volumetric pump
- Boiler and pump pressure control gauge
- One manual steam wand for frothing and steaming milk
- C-Lever ergonomically designed steam hand features two positions, pulse steam (down) or steam fully on (up)
- Hot water outlet with manual valve knob control
- Scratch-proof polymer drain insert that can be removed and easily cleaned in dishwasher
- Adjustable feet
- 1-year parts warranty

OPTIONS:

Color Options: Anthracite Black and Ice White

ACCESSORIES IN THE BOX:


- 1 Group - 1 double porta filters
- Rubber blind disks for cleaning
- User manual
- Foot extensions

SPACE REQUIREMENTS:

- Allow 6" clearance on all sides of the machine.
- Allow 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.
- Allow a minimum of 3" (7.62 cm) clear space under filter to facilitate filter change.

RANCILIO Classe 5 S 1 Group

Entry-level to Mid range Traditional Espresso Machine

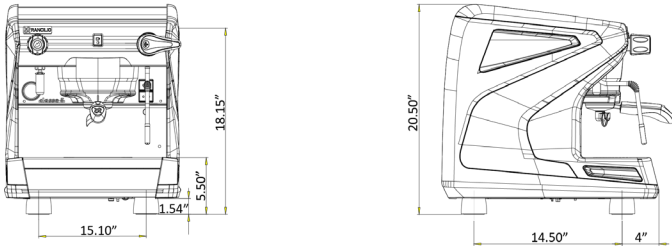

PLEASE NOTE: Power can be installed under or above counter. Please allow 3-4" of space for the plug, especially when placing power above the counter and behind the machine.


COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
1 GROUP			
16"	22"	21"	73 lbs

SHIPPING DIMENSIONS AND WEIGHT:

Length	Width	Height	Weight
1 GROUP			
29"	26"	35"	115 lbs

DRILLING PLAN



(front)



SERVICE CONNECTIONS:

Electrical Connections


1 GROUP

Voltage Range: 110-120 VAC Single Phase


Watts: 1600 W

Circuit Size: 15 amps

Suggested Receptacle: 15a GFI or 5-15R



15a GFI



5-15R

WATER CONNECTIONS:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine required.

DRAIN REQUIREMENTS:

Open gravity drain rain with minimum 2" I.D. within 4' of the machine.

WATER QUALITY STATEMENT:

The fact that water is potable is no guarantee that it is suitable for coffee machines. Your water supply must be within these general guidelines:

SUPPLY PRESSURE: 30-70 psi

HARDNESS: 2-3 GPG (1 grain of hardness = 17.1 ppm)

Water entering the machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 3 GPG) or mineral addition cartridge (if below 2 GPG) is required for the coffee machine to operate properly over time (see Rancilio Group North America Water Quality Statement for further details).