



## GENERAL FEATURES

- Rack size **56.5x69 cm**
- Gross weigh: 169,5 Kg
- Washing cycle/racks/hour:  
3'-6'-9'/20-10-7
- Lower and upper wash/rinse arms
- Wash pump: 1,3 Kw
- Boiler capacity: 11 litri
- Tank capacity: 50 litri
- Boiler heating element: 6,0 Kw
- Tank heating element: 2,8 Kw
- Water quantity per cycle: 3,0 litri
- Elettromeccanical controls
- Temperature indicators for tank and boiler
- Useful washing height: 650 mm
- Magnetic door microswitch
- Automatic water filling
- Hot rinse
- Thermostop function
- Self-cleaning vertical pump
- PRS system (Atmosperic Boiler+Break tank)

## FILTRATION

- Pre-filtering of the tank water by means of no. 1 stainless steel filter equipped with collection basket
- Pump filter in stainless steel, easily removable

## BODY

- AISI 304 stainless steel Body
- Single skinned body
- Preformed wash tank
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 316

## EQUIPMENT AS GLASSWASHER

- 1 inox basket 56.5x69 cm
- 1 inlet hose (length 1,5 m)
- 1 drain hose (length 2 m)

## OPTIONAL

- Drain pump
- HD version (P.Tot. 10,1 kW, 380-415V3N ~ only)
- Double electric detergent and rinse dispenser
- Hot water filling

## ACCESSORIES FOR WATER TREATMENT

- External softener

## ACCESSORIES

- Stainless steel special tray holders

## INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

## MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided


## WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

## TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N~ / 220-240V3~50Hz**
- Total power: **7.3 kW**
- Amperage: **11 A / 20 A**
- Power cord supply size: **5 x 4 mmq**

## AU 55.65 EASY PRS

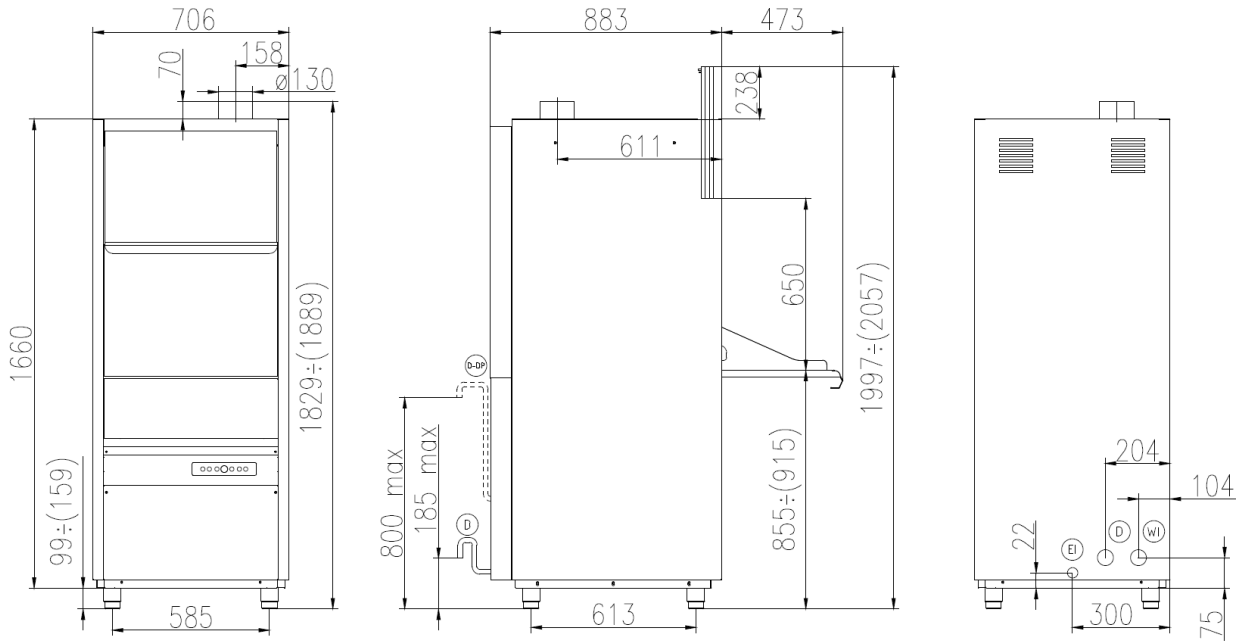

(EI)

CAVO DI ALIMENTAZIONE  
POWER CORD SUPPLY  
CABLE D'ALIMENTATION  
CABLE DE ALIMENTACION

(WI)

CANNA DI CARICO G 3/4 L=2000 mm  
G 3/4 INLET HOSE L=2000 mm  
TUYAU D'ALIMENTATION G 3/4" L=2000 mm  
TUBO DE ALIMENTACION G 3/4" L=2000 mm

(D)

TUBO DI SCARICO  $\phi$  40 mm L=2000 mm  
DRAIN HOSE  $\phi$  40 mm L=2000 mm  
TUYAU DE VIDANGE  $\phi$  40 mm L=2000 mm  
TUBO DE DESAGUE  $\phi$  40 mm L=2000 mm

(D-DP)

TUBO DI SCARICO  $\phi$  29 mm L=2500 mm (CON POMPA SCARICO)  
DRAIN HOSE  $\phi$  29 mm L=2500 mm (WITH DRAIN PUMP)  
TUYAU DE VIDANGE  $\phi$  29 mm L=2500 mm (AVEC POMPE DE VIDANGE)  
TUBO DE DESAGUE  $\phi$  29 mm L=2500 mm (CON POMPA DE DESAGUE)

	Min 10°C-MAX 50°C Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar) 100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20f-2.8÷11'd